


WOOD OR THIN METAL

Piercing Capacity: CS & 410SS <=20 ga

#10, #12, & 1/4" PIERCING POINTS AND DRILL POINTS


CONCEALOR[®] low profile head fasteners are engineered to perform in a variety of applications. They are specified in many metal roofing systems to attached SSR clips to metal or wood. They are easy to install and provides optimal strength.

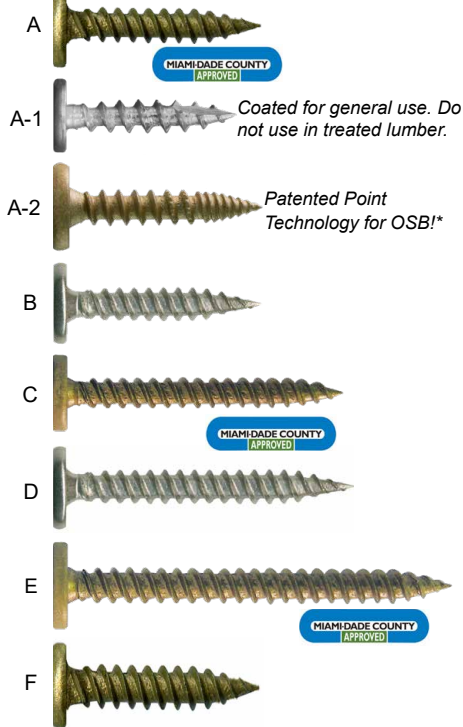


SIZES MEETS FLORIDA BUILDING CODE 1506.6 & R904.5.2 (TRI-SEAL[®] & SS ONLY)

	Description	Load Bearing Length (Max)	Part Number	Box Quantity	WT Per Box
A	#10-13 X 1" GP Long-life TRI-SEAL [®] coated	1"	10100SPCGCSTS	5,000 pcs	36.0 lbs.
A-1	#10-9 X 1" Type 17 Coated for general use	1"	10100SPC17CSCZ	5,000 pcs	36.0 lbs.
A-2	#10-12 X 1" BURR BUSTER Long-life TRI-SEAL [®] coated	1"	10100SPCGBBCSTS	5,000 pcs	36.0 lbs.
B	#10-13 X 1" GP 302 Stainless Steel	1"	10100SPCGS3	5,000 pcs	39.0 lbs.
C	#10-13 X 1-1/2" GP Long-life TRI-SEAL [®] coated	1-1/2"	10150SPCGCSTS	3,000 pcs	31.0 lbs.
D	#10-13 X 1-1/2" GP 302 Stainless Steel	1-1/2"	10150SPCGS3	3,000 pcs	32 lbs.
E	#10-13 X 2" GP Long-life TRI-SEAL [®] coated	2"	10200SPCGCSTS	1,500 pcs	19.0 lbs.
F	#12-11 X 1" GP Long-life TRI-SEAL [®] coated	1"	12100SPCGCSTS	5,000 pcs	44.0 lbs.
G	#10-16 X 5/8" DP3 .0003" Zinc and Yellow	.125"	10062SPC3CS	5,000 pcs	27.0 lbs.
H	#10-24 X 5/8" DP3 .0003" Zinc and Yellow	.125"	10062SPC3CSYZ	5,000 pcs	27.0 lbs.
I	#10-16 X 1" DP3 Long-Life TRI-SEAL [®] coated	.500"	10100SPC3CSTS	5,000 pcs	37.0 lbs.
J	#10-16 X 1" DP3 410 Stainless Steel / ZP	.500"	10100SPC3S4	5,000 pcs	37.0 lbs.
K	#10-16 X 1-1/2" DP3 Long-Life TRI-SEAL [®] coated	1"	10150SPC3CSTS	3,000 pcs	32.0 lbs.
L	#10-16 X 2" DP3 Long-Life TRI-SEAL [®] coated	1.5"	10200SPC3CSTS	1,500 pcs	21.0 lbs.
M	#12-14 X 1" DP3 Long-Life TRI-SEAL [®] coated	.375"	12100SPC3CSTS	5,000 pcs	43.0 lbs.
	#12-14 X 1" DP3 304SS Bi-Metal	.375"	12100SPC3BM	5,000 pcs	43.0 lbs.
N	#12-14 X 2" DP3 304SS Bi-Metal	1.5"	12200SPC3BM	1,500 pcs	21.0 lbs.
O	#12-24 X 1-1/4" DP5 Long-Life TRI-SEAL [®] coated	.500"	12125SPC5CSTS	4,000 pcs	52.0 lbs.
	#12-24 X 1-1/2" DP5 Long-Life TRI-SEAL [®] coated	.625"	12150SPC5CSTS	4,000 pcs	43.8 lbs.
P	1/4-14 X 1" DP3 Long-Life TRI-SEAL [®] coated	.325"	14100SPC3CSTS	2,500 pcs	27.0 lbs.

METAL SUBSTRATES

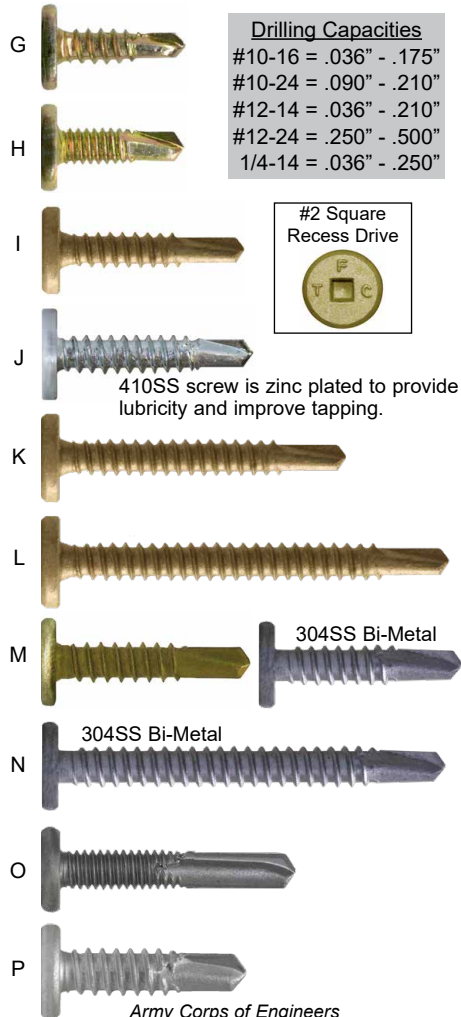

Drilling Capacities
 #10-16 = .036" - .175"
 #10-24 = .090" - .210"
 #12-14 = .036" - .210"
 #12-24 = .250" - .500"
 1/4-14 = .036" - .250"



Bagged 250 pcs. per bag

SPECIAL APPLICATIONS

Assemble CONCEALOR[®] with a bonded sealing washer that locks out weather!



We can color match to your exact requirements in three days or less!



Installation: Do NOT use impact drivers. Use 2,500 RPM max variable speed screw drivers with torque control or depth sensing nosepiece.

*Pat. No.: 11,105,362

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes. (0321-1)